



HAYWARD®

Quick Reference Guide

Universal ColorLogic® & CrystaLogic™



ColorLogic - Switched LEDs

- | | |
|------------------------|-----------------------------|
| 1. Voodoo Lounge (S) | 10. Vivid Violet (F) |
| 2. Deep Blue Sea (F) | 11. Sangria (F) |
| 3. Royal Blue (F) | 12. Twilight (S) |
| 4. Afternoon Skies (F) | 13. Tranquility (S) |
| 5. Aqua Green (F) | 14. Gemstone (S) |
| 6. Emerald (F) | 15. USA (S) |
| 7. Cloud White (F) | 16. Mardi Gras (S) |
| 8. Warm Red (F) | 17. Cool Cabaret (S) |
| 9. Flamingo (F) | (S) = Show (F)= Fixed Color |

UCL

| |
|------------------------|
| Pool: 14VAC, 60Hz, 70W |
| OR |
| Spa: 14VAC, 60Hz, 35W |

Changing Modes (ColorLogic)

- Turn on lights, then off for 11-15 seconds (repeat 3 times)
- Turn light back on, light should blink 1 of 4 colors (indicating light's mode)
 1. Universal ColorLogic (Red & White)
 2. Color Logic 4.0 (Green & White)
 3. ColorLogic 2.5 (Blue & White)
 4. Pentair SaM (White & White)


Repeat 3 times



Note: To toggle light modes turn light OFF then back ON immediately, repeat until desired mode is selected turn off for two minutes to save

Syncing the Lights (ColorLogic)

- To synchronize the lights turn them on, then off for 11 - 14 seconds and then back on

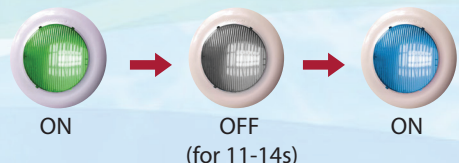







Quick Reference Guide - Programming

ColorLogic - Networked LEDs




- 18. Rainbow (S)
- 19. Harmony (S)
- 20. Custom Fade (S)
- 21. Custom Chase (S)

With module, network LEDs also offer these shows (on top of those mentioned on front page)

STEP 1




- Press  until  appears, then hold down < & >  should appear after 5 seconds
- Press > until  appears, then press +;  will appear, press + to start sequence
- Once find is  Scroll to the > to label light(s), use the ± to change and > to navigate forward (helpful in complicated shows)

STEP 2

- Select AUX for light(s) and locate by pressing >  (example)
- Press + then press > until  appears
- Press + until relay type is set to , then press > button
- Assign LT(s) for this show by pressing ±, use > button to advance
- Assign order of sequence using ±, use > button to advance

Step 2 should be repeated for any open relays we wish to use as ColorLogic shows

STEP 3

- Press  until  appears and press > until the first AUX containing a show appears  (example)
- Press > to navigate through program, color, speed, motion and brightness and the ± to make changes

Step 3 should be repeated for all relays identified as ColorLogic

To take a closer look or see other Hayward products please go to:

www.hayward.com or call 1-800-432-8387



QRG-UCLb